



Chassis

- 2019 Spartan Gladiator
- MFD 5" Raised Roof Cab
- Spartan Advanced Protection System (APS)
- Integral Torquebox frame
- Wheelbase 235"
- 21' Severe Duty front bumper
- Engine Cummins 565 HP X15 1850 ft. lbs. Torque @ 1150 RPM
- Engine Compression Brake
- Transmission Allison 4000 EVS
- Front Fluid Fills
- 68 Gallon Fuel Cell
- Meritor MFS-20 23,000 lb. 48 L/ 44R degree Cramp Angle
- Meritor RT-52-185 58,000 lb.
- Goodyear Tires
- Alcoa Aluminum Wheels
- ABS/ATC/ESC w/17" Front Disc and 16.5"X7" rear S-Cam brakes
- 6 Person Seating/5 SCBA Bostrom w/IMMI Holders
- Weldon MUX Display Vista L/R Dash

- X-Duty Interior W/ Spar-Liner Medium Gray Finish
- Power Windows
- SGM Overhead A/C
- Leece – Neville 320 AMP Alternator
- Kussmaul Auto Charge battery conditioner
- FRC Spectra 950 series 12V Side Scene Lights
- Audiovox Rear/Camera System


Body

- Body - .125" Aluminum Formed Body Construction – 98" wide
- ROM Painted Roll-Up Doors
- ROM LED Compartment Lighting
- Line – X Interior Compartment Finish
- Rear pull out storage area
- 163' Ground Ladder Package – Duo Safety
- Duo-Safety Pike Pole Package
- Harrison 10W Hydraulic Generator
- FRC Spectra MAX-S LED 120V Scene Lights
- Two (2) Hannay 200' 12/3 Cord Reels
- Whelen Upper/Lower LED Lighting Package






Aerial

- Mid Mounted Ladder Platform with Five (5) section telescoping heavy duty aerial
- 93' Vertical Reach at 78 degrees elevation
- 88' - 6" Horizontal Reach @ 0 degrees elevation
- 1000 lbs. Dry/500lb. Wet Platform load Unrestricted
- 2000 GPM water flow capacity with dual TFT Monsoon monitors
- -10 to +78 Degrees Operation on slopes up to 10 degrees
- "H" style "out and down" outriggers; (2) 18' Front and (2) 16' Rear - Short Jack capable
- Two (2) swing down front bumper stabilizers
- Modular Platform with 29 sq/ft of working area
- Platform compartments with 7.5 cu/ft storage for equipment
- Platform lifting arms
- Rescue stokes basket holders
- Parapet ladder mounting brackets
- Cab/Body Damage Protection Interlock System
- Roof Ladder Storage in fly Section
- FRC So-Brite LED Base/Tip Lighting
- Waterway Inlet both of Body





GROUND LADDER PACKAGE

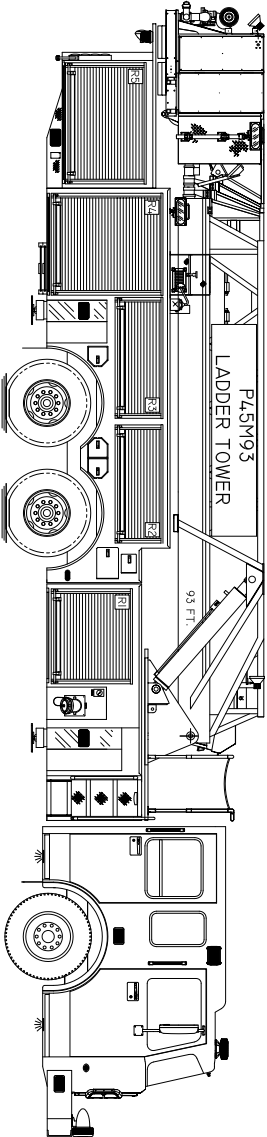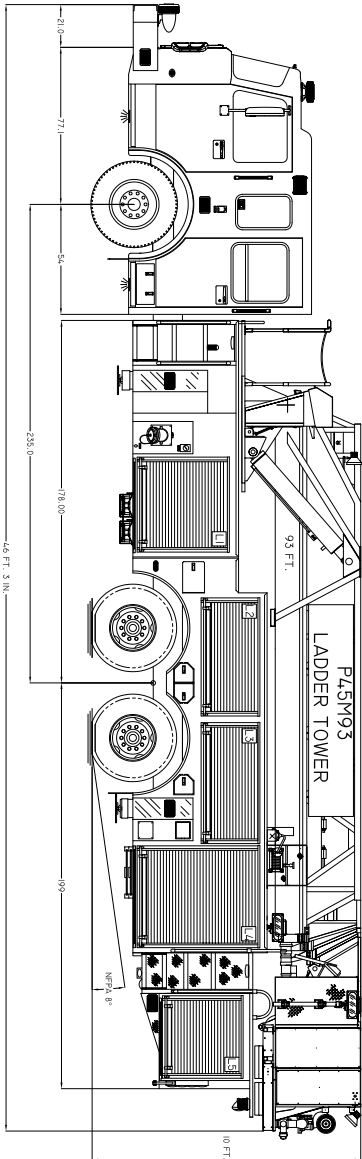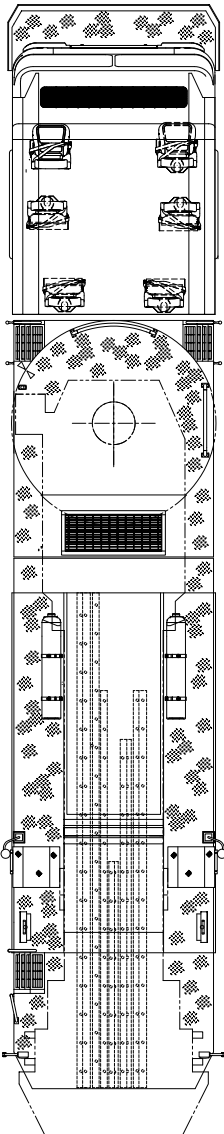

CHASSIS:	SPARTAN GLADIATOR MPD 5TRR
ENGINE:	CUMMINS ISX 500HP
TRANSMISSION:	ALLISON 4000 EWS
AXLES:	23,000 LB. FRONT / 58,000 LB. REAR
MODEL:	P45M-93 MID-MOUNT TOWER
WATER/FOAM:	N/A
PUMP:	N/A
FOAM SYSTEM:	N/A
GENERATOR:	HARRISON 8.0 KW

PRELIMINARY COMPARTMENT SIZES

ID.	OPENING	INTERIOR DIMENSION
L1	4.5 87" W X 39.75" H	4.9 25W X 4.9 25H X 23.25D
L2	5.5 37" W X 26.12" H	6.3 37W X 5.5 62H X 24.50D
L3	5.5 37" W X 26.12" H	6.0 37W X 5.5 62H X 24.50D
L4	4.7 75" W X 54.75" H	5.2 50W X 4.9 25H X 24.50D
L5	4.0 12" W X 32.25" H	4.2 25W X 4.0 25H X 23.25D
R1	4.5 87" W X 39.75" H	4.9 25W X 4.9 25H X 23.25D
R2	5.5 37" W X 26.12" H	6.3 37W X 5.5 62H X 24.50D
R3	5.5 37" W X 26.12" H	6.0 37W X 5.5 62H X 24.50D
R4	4.7 75" W X 54.75" H	5.2 50W X 4.9 25H X 24.50D
R5	4.0 12" W X 32.25" H	4.2 25W X 4.0 25H X 23.25D

NOTE: COMPARTMENT DIMENSIONS SHOWN ARE APPROXIMATE. FINAL DESIGN AND MODELING OF THE P45M93 BODY DESIGN.

GROUND LADDERS:
 ONE 28 FT. 1000A 2-SECTION
 ONE 24 FT. 900A 2-SECTION
 ONE 20 FT. 875A ROOF
 ONE 16 FT. 700A 2-SECTION
 ONE 10 FT. 585A FOLDING SIX HOOKS/POLES

CUSTOMER
 THIS DRAWING IS A CLOSE APPROXIMATION OF YOUR FIRE APPARATUS. IN ALL CASES WHERE THE DRAWING AND THE APPARATUS DO NOT MATCH, THE APPARATUS SHALL PREVAIL. PLEASE WORK WITH YOUR DEALER TO ASSURE THAT THE WRITTEN SPECIFICATION REPRESENTS WHAT YOU WANT IN YOUR FINISHED PRODUCT. SPARTAN EMERGENCY RESPONSE BODIES TO ASSURE THAT YOUR WHEELS ARE HELI.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SPARTAN EMERGENCY RESPONSE. ANY REPRODUCTION OR TRANSMISSION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF SPARTAN EMERGENCY RESPONSE IS PROHIBITED. SPARTAN MOTORS, INC. DIVA SPARTAN UTHERCLIFF, MISSOURI.

2018 SPARTAN/LADDER TOWER CO.
 P45M93 MID-MOUNT TOWER
 TRUCK NUMBER: 000000 DRAWING NO. 3-020-034.3