



AERIALS

93' MID MOUNT PLATFORM



**Uncompromised Performance.
Uncompromised Safety.**

The Ladder Tower 93' Mid Mount Platform combines best in class chassis safety with unrestricted operational performance at any extension or position. Its short wheelbase, minimal overhang, and tight turning radius makes it ideal for aerial rescue and firefighting in urban areas with narrow streets, alleys, and access areas. The tipload capacity is the best in the industry at 1,000 lbs. dry and 500 lbs. at full extension while flowing 2,000 gpm. And at an overall height of 10'8", it easily fits into older firehouses, under viaducts, and urban bridges.

Benefits:

- The 93MM's shorter overall length (46') and wheelbase (235"), less weight, and less tail swing improves maneuverability while driving on tight streets
- Best in class platform tipload capacity — 1,000 lb. dry, 500 wet
- 93' vertical reach with 89' of horizontal reach
- -10° to +78° angle of operation
- Modular built platform
- 25-year aerial structural warranty – best in industry


**Take your department
to new heights.**

Working in urban areas creates challenging environments with narrow passageways and tall buildings. Spartan Aerials respond with tightly built, highly maneuverable aerials that can reach new heights with industry-leading tiploads.

Give us a call to help you answer every call.

517-543-6400
emergencyresponse.spartanmotors.com



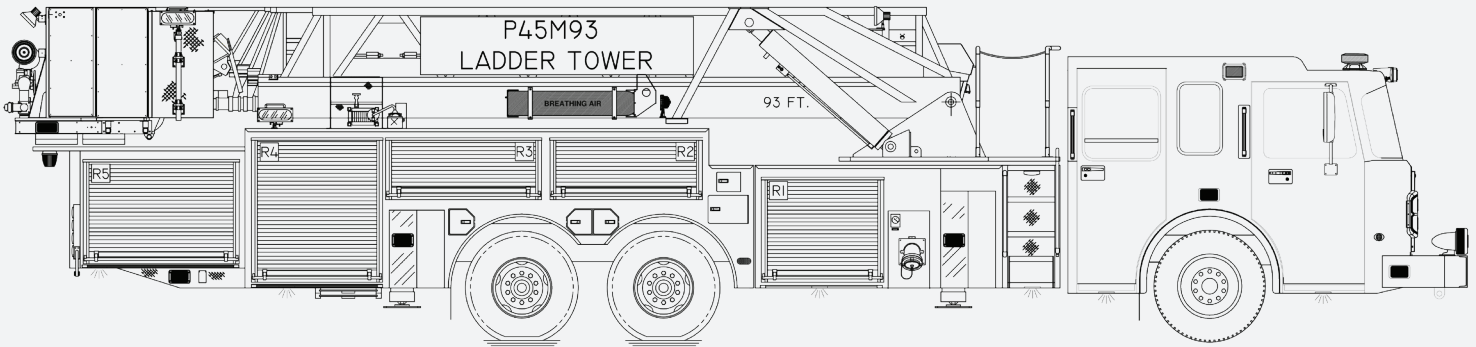

LTC 93' Mid Mount Platform

Vertical Reach	93' (28 m)
Horizontal Reach	89' (27.1 m)
Angle of Elevation	-10° to +78°
Outrigger Configuration	H-type, out-and-down style
Stabilizer Spread	18' mid-position and 16' rear position with 13' (4 m) short jacking capability
Tip Load Ratings	1,000 lbs. (554 kg) dry; 500 lbs. (227 kg) flowing; 2,000 gpm (7571 L/m)
Flow Capacity	2,000 gpm (11,356 L/m)
Ladder	All-steel construction with k-bracing, Dual-cylinder extension system with Triangulated Lifting Configuration (TLC)
Modular Aerial Platform	1,000 lbs. capacity
O.A.L. (Typ.) Range	46' to 48'
O.A.H. (Typ.) Range	9'10" to 10'8"
Wheelbase (Typ.) Range	240" to 268"
Communication	Two-way system
Standards	Meets or exceeds NFPA 1901 requirements, Type 1 UL certification
Chassis	Gladiator
Fire Pump	Hale, model 8GF, single stage unit with capacities of 1,500 and 2,000 gpm